

# 18LWCO LIGHTED WIND CONE

## FEATURES:

- Lightweight 16' Aluminum mounting pole (shipped in 3 sections for easy installation)
- Lightweight Aluminum Sleeve Frame with 18" x 8' Windsock
- Sealed Roller Bearings designed for low drag and full 360 degrees rotation in any weather condition.
- Hinged Anchor Plate, nylon tag line, and pole rest, allow for easy one-man servicing.

## OPTIONS:

- 18LWCO - Four 150W Floodlights with L-810 single obstruction light.
- 18LWC - Four 150W Floodlights, obstruction light.
- 18UWCO - Unlighted Windcone, with L-810 single obstruction light.
- 18WC - Unlighted Windcone, no obstruction light.



**FAA AC 150/5345-27B  
TYPE L-807  
STYLE 1 AND STYLE 2  
SIZE 1**

**manairco**


Manairco Inc. P.O. Box 111 Mansfield, Ohio 44901-0111  
Call Toll Free 1-800-524-2121  
Fax 419-525-4790  
e-mail [manairco@manairco.com](mailto:manairco@manairco.com)  
[www.manairco.com](http://www.manairco.com)

# LIGHTED WIND CONE

## SPECIFICATIONS

Lighted Power Input.....	120VAC 50/60 Hz
Floodlights.....	150 Watt Lamps
Obstruction Light.....	FAA Approved Type L-810
Minimum Wind Speed.....	3 Knots
Sock Fully Extended.....	15 Knots
Height.....	24 Feet, 6 Inches
Shipping Weight.....	135 lbs.
Shipping Dimensions.....	1 box, 20"x 24"x 68'

### FOUNDATION DETAILS

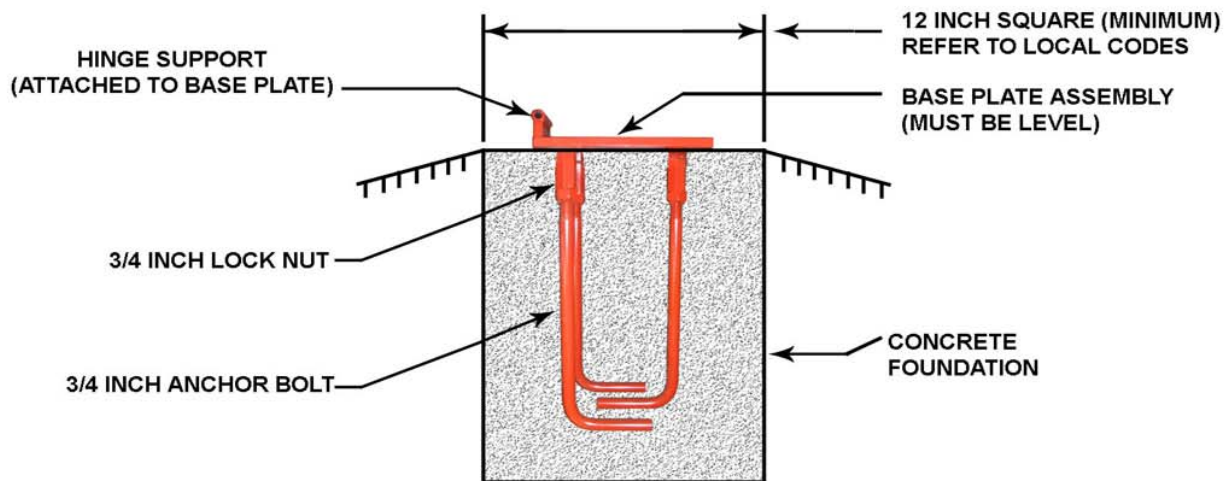

### HINGE ATTACHMENT

